


Electrical Yarn Cutter "TF"

with Yarn Clamp and Integrated Spark Extinguishing Applicable for all Yarns and Filaments

Special Features:


- very compact construction
- correct cutting of the yarn
- high range of voltage
- connection with solid AMP-tabs
- two different ceramic yarn guides
- solid plastic housing
- blades and anvil exchangeable
- less power consumption
- integrated spark extinguishing
- long duration of life

Shape of eyelets:

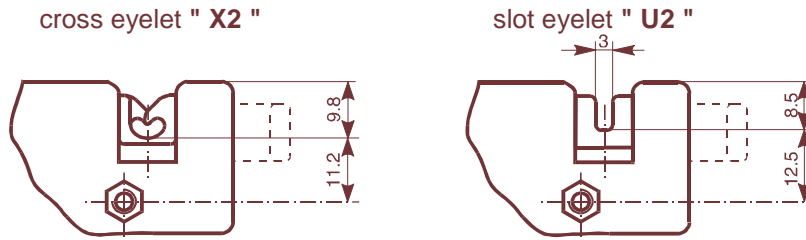


Execution:

blade on side 1

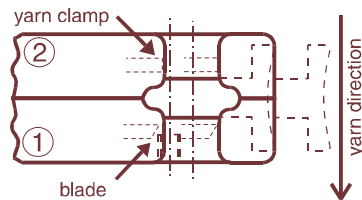

clamp on side 1

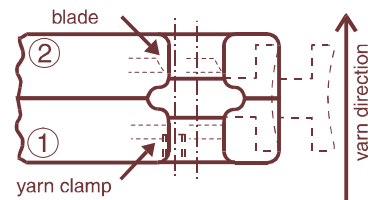


Standard fitting on side 1, but fitting thread M4 can be easily exchanged to side 2.

Shape of eyelet:	cross eyelet		slot eyelet	
Blade:	side 1	side 2	side 1	side 2
Part No.:	TFX211	TFX221	TFU211	TFU221

Technical Data:

- Voltage: 24V DC.
(20V...36V D.C.)
- Power Consumption: 200 mA
(bei 24V DC)
- Reaction Time: 20 ms
- Operation Range: up to 3000 dtex

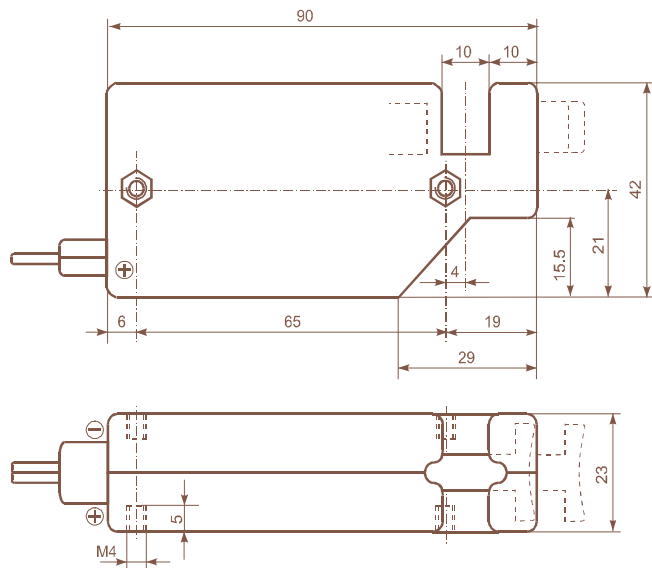

TF_1GB.DOC 280700

OTTO STÜBER GMBH & CO. KG

D - 73266 Bissingen/Teck • Germany
Pfarrstrasse 23 • POB 52
Telefon +49 (0) 70 23 / 95 02 - 0
Telefax +49 (0) 70 23 / 95 02 - 33

STÜBER

<http://www.stuber.de> • email: info@stuber.de